

QS4P.3 ; QS4X.3

Electropompa submersibila de
4", Varianta P+X


S.C.SYSNEC BLUE S.R.L.

www.sysnec.ro

neculuciann@gmail.com

contact@sysnec.ro

TEL: 0741.569.259

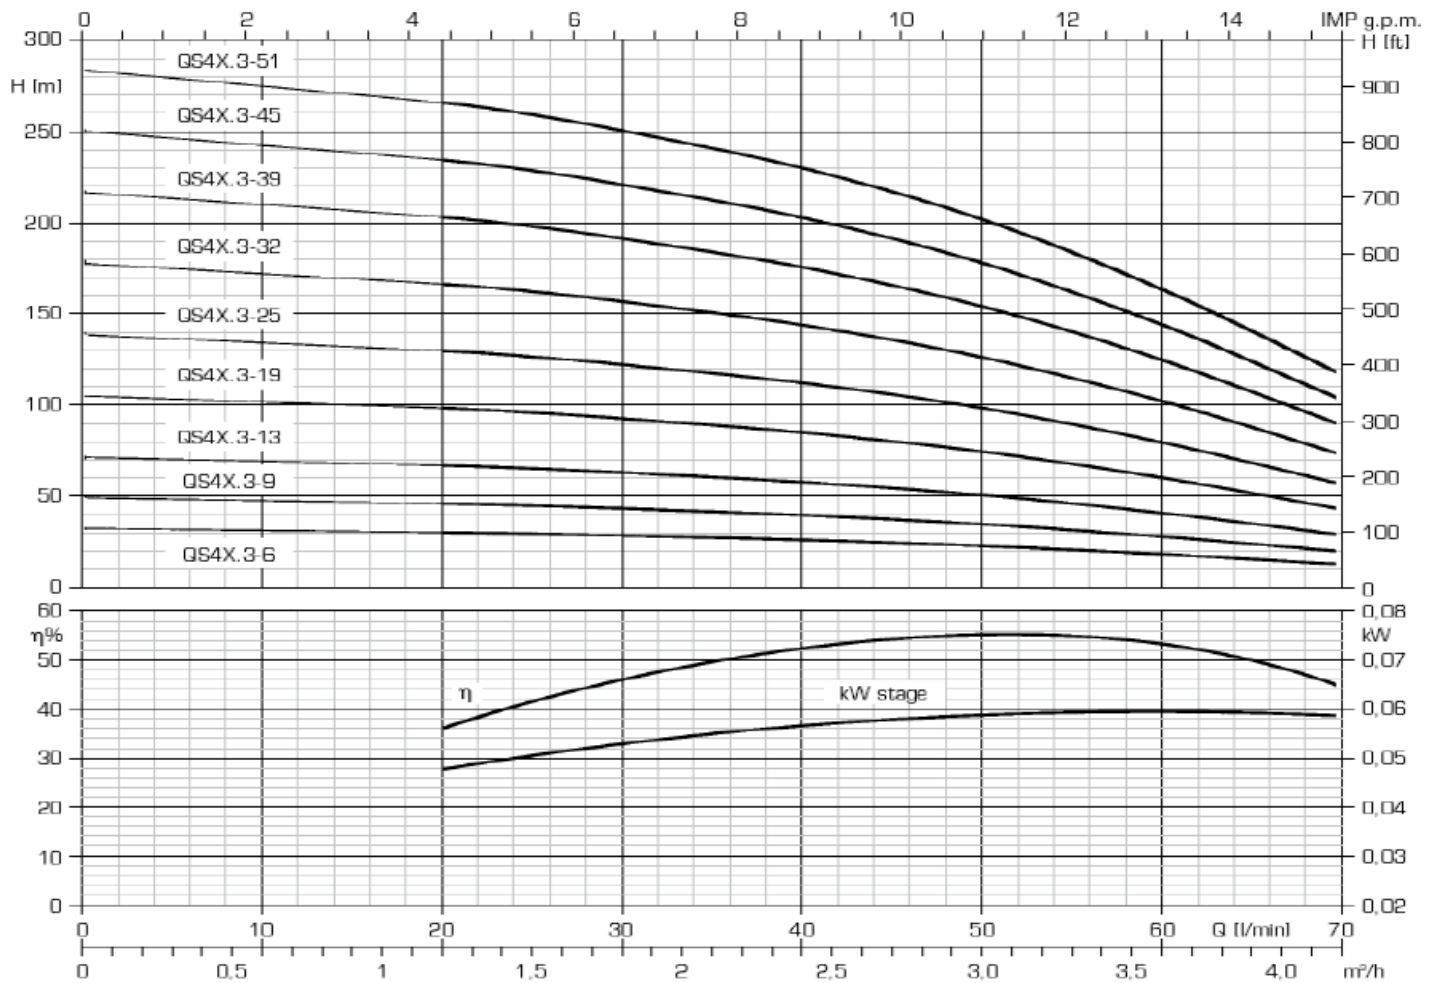

Electropompă QS4P.3 Electropompă QS4X.3 cu 2 metri cablu	CARACTERISTICI HIDRAULICE (n=2850rpm)								Lungime	Greutate
	Debit (Q) – Diametru refulare: 1" ¼ G-F									
	mc/h	0	1,2	1,5	1,8	2,4	3	4,2	(mm)	(kg)
QS4P.3-6 / 0,37kW/220V QS4X.3-6 / 0,37kW/220V	l/min	0	20	25	30	40	50	70	781	11,1
QS4P.3-9 / 0,55kW/220V QS4X.3-9 / 0,55kW/220V	Presiune (mca)	33	31	30	29	27	24	14	894	12,4
QS4P.3-13 / 0,75kW/220V QS4X.3-13 / 0,75kW/220V		50	47	45	44	40	35	20	1049	14,3
QS4P.3-19 / 1,1kW/220V QS4X.3-19 / 1,1kW/220V		72	67	66	64	58	51	30	1279	17,5
QS4X.3-25 / 1,5kW/220V QS4X.3-25 / 1,5kW/380V		105	99	96	93	85	75	43	1467	21,2
QS4X.3-32 / 2,2kW/220V QS4X.3-32 / 2,2kW/380V		139	130	127	122	112	99	57	1727	23,4
QS4X.3-39 / 2,2kW/220V QS4X.3-39 / 2,2kW/380V		177	166	162	157	144	126	73	1954	24,8
QS4X.3-45 / 3kW/380V		216	203	198	191	175	154	89	2182	26,9
QS4X.3-51 / 3kW/380V		250	234	228	220	202	178	103	2377	28,6
		283	265	258	250	229	201	117		