

QS4P.1 ; QS4X.1

Electropompa submersibila de 4", Varianta P+X


S.C.SYSNEC BLUE S.R.L.

www.sysnec.ro

neculaluciann@gmail.com

contact@sysnec.ro

TEL: 0741.569.259

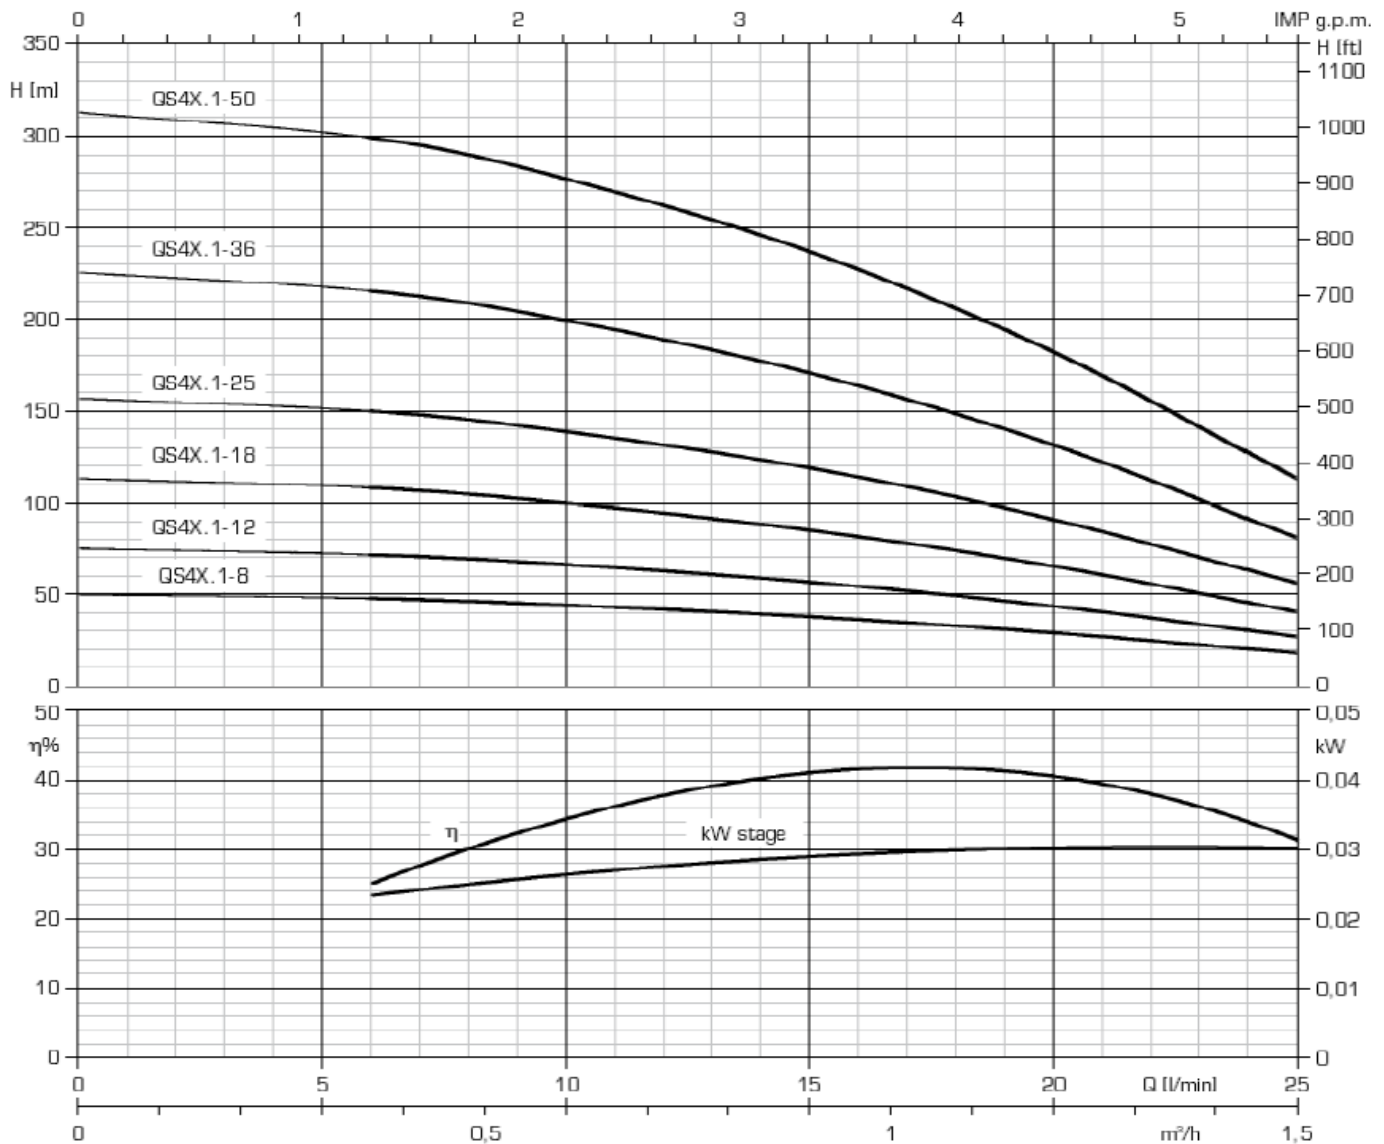

Electropompă QS4P.1 Electropompă QS4X.1 cu 2 metri cablu	CARACTERISTICI HIDRAULICE (n=2850rpm)							Lungime (mm)	Greutate (kg)
	Debit (Q) – Diametru refulare: 1" ¼ G-F								
	mc/h	0	0,36	0,6	1	1,2	1,5		
	l/min	0	6	10	16,7	20	25		
QS4P.1-8 / 0,25kW/220V QS4X.1-8 / 0,25kW/220V	Presiune (mca)	50	48	44	35	29	18	746	11
QS4P.1-12 / 0,37kW/220V QS4X.1-12 / 0,37kW/220V		75	72	66	53	44	27	826	11,5
QS4P.1-18 / 0,55kW/220V QS4X.1-18 / 0,55kW/220V		113	108	100	80	65	40	961	13,1
QS4P.1-25 / 0,75kW/220V QS4X.1-25 / 0,75kW/220V		157	150	139	110	91	56	1126	15,1
QS4X.1-36 / 1,1kW/220V		226	216	200	160	131	81	1414	19,5
QS4X.1-50 / 1,5kW/220V QS4X.1-50 / 1,5kW/380V		314	300	277	220	182	112	1687	23,6